


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 4
DATE: --5-31-00-- 4-1-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-6-94

IN. S.P.C. E ZONE, NAD 83
NAME: 14042202
N: 488884.0641(m)
E: 65115.3501(m)

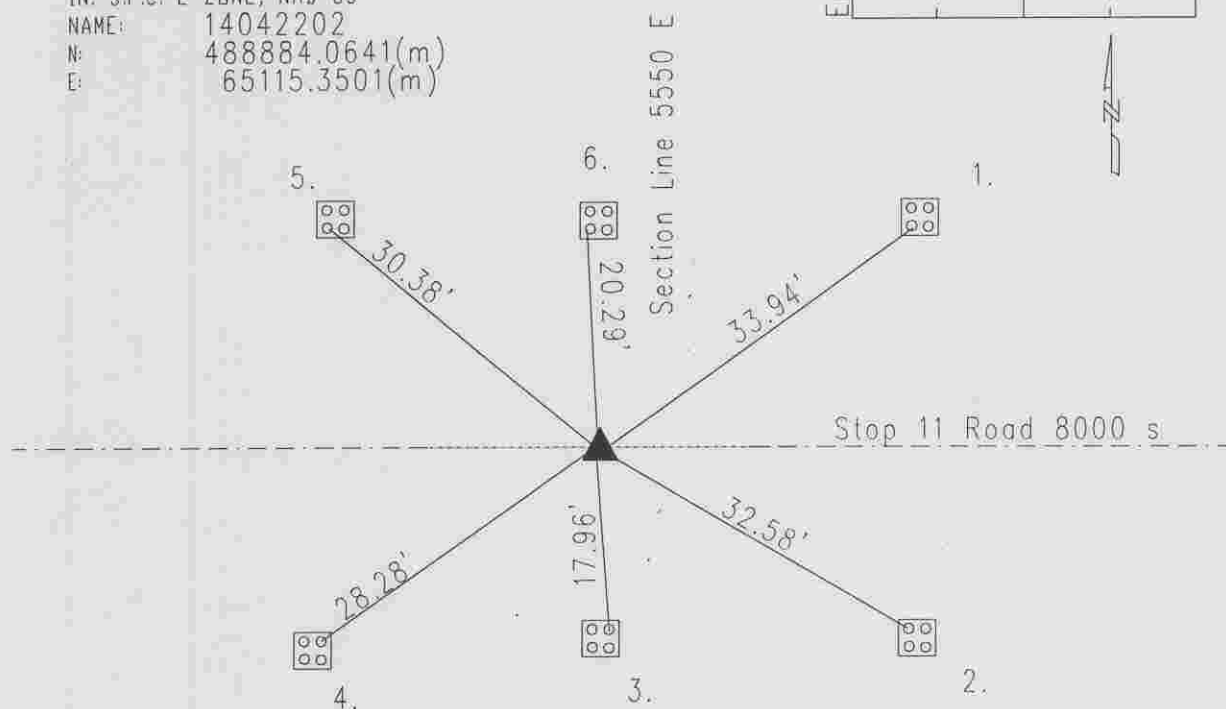

Original post set 1820 by John Hendricks with witnesses: 30" beech N 68 W 25 links; 12" sugar S 42 E 24 links per Marion County Atlas pg. 9. Survey by Percy Hosbrook 11-8-1849 indicates no stone bu witness stake driven in as the corner. per Franklin Township Legal Survey Book pg. 25. Percy Hosbrook 11-10-1849 indicates no stone but witness: (1) witness standing and plainly marked ; but dead. new witness: 30" oak S 9 E 37 links, 18" ash N 51 E 35 links per Franklin Township Legal Survey Book pg. 26. GWS 10-1-63 called a pipe over stone 10" dn. McLand 1-28-69 called Johnson Surveyor's marker. McLand 4-16-70 called same. McLand 5/11/71 called same 5" dn. Wilcoxon 8-20-75 called a brass plug. Green 9-20-79 called a brass plug. Wilcoxon 5-9-85 called brass plug. Wilcoxon 10-6-94 called brass plug in steel box 4" dn. Excavated by Wilcoxon 5-31-00 Harrison set.

HC 442202

REF.	DISTANCE	DESCRIPTION
1.	33.94'	Cut 'x' in bolt of I-beam guard rail
2.	32.58'	Cut 'x' in bolt of I-beam guard rail
3.	17.96'	Cut 'x' in bolt of I-beam guard rail
4.	28.28'	Cut 'x' in bolt of I-beam guard rail
5.	30.38'	Cut 'x' in bolt of I-beam guard rail
6.	20.29'	Cut 'x' in bolt of I-beam guard rail